



## Extra life choice for demanding highway applications.

Whether you're driving an over-the-road truck, tractor or trailer, this unique brake lining is perfect for moderate to heavy-duty long-haul applications. Crest XL exceeds the performance of the competition in the same category due to its superior formulation combined with the Wave Process.

- Medium friction asbestos-free brake block
- Glass-acrylic-based fiber
- Excellent drum compatibility and friction stability
- Low sensitivity to speed and temperature
- Low thermal expansion provides great compatibility with automatic slack adjusters
- 20,000 lb. moderate- to heavy-duty applications
- Ideal for over-the-road trucks, tractors and trailers
- Brake performance and lining exceeds the competition in the same category



*High performance friction with superior service and support. Contact us for brake training.*

**STEMCO**  
**BRAKE PRODUCTS™**


[www.stemcobreakeproducts.com](http://www.stemcobreakeproducts.com)



## CATCH THE WAVE.

Our patented and revolutionary “Wave Process” assures higher performance and a longer life along with a lower noise level. This patented technology begins with the cold mold cycle, which creates the unique wave pattern. Hot molding then forces the waves to condense under heat and pressure. Aligning the friction density into column structures assures less heat susceptibility, which results in quieter, longer lasting brakes.

## THE WAVE PROCESS

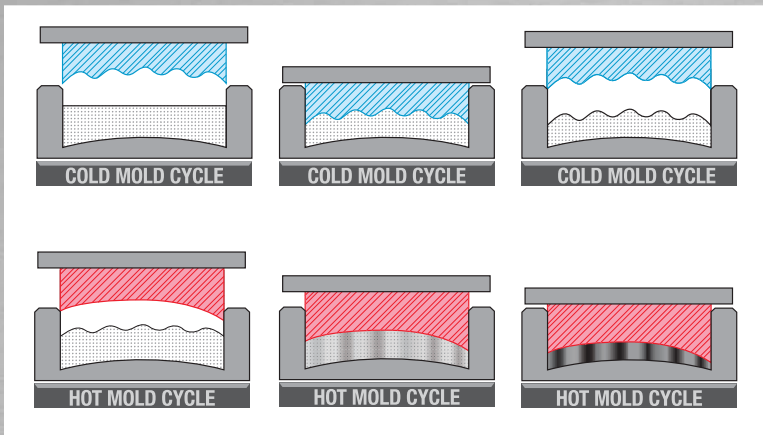

## Dynamometer Test Parameters:

Axle rating:	20,000 lbs.
Brake size:	16.5 x 7 in.
AL factor:	30 x 5.5
Rolling radius:	19.6 in.

## Properties:

Specific gravity:	1.88
Gogan hardness:	27
CoF	FF

### STEMCO-USA


P.O. Box 1989, Longview, Texas 75606-1989 1-800-527-8492

### STEMCO-Canada


5650 Timberlea Blvd. Unit B, Mississauga, ON L4W 4M6 (905) 206-9700

[www.stemcobreakeproducts.com](http://www.stemcobreakeproducts.com)


## Dynamometer FMVSS 121 Performance Test

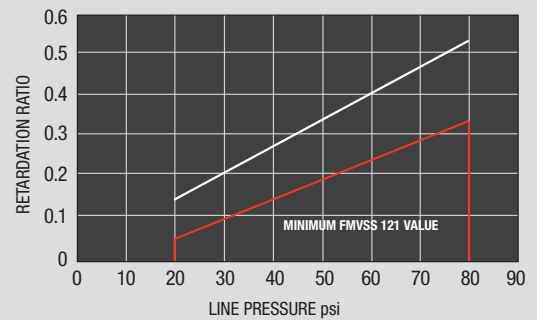

## Brake Power

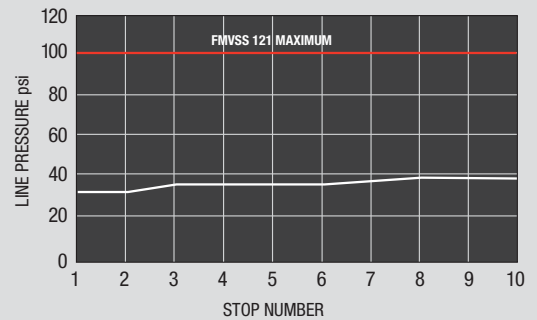

## Recovery

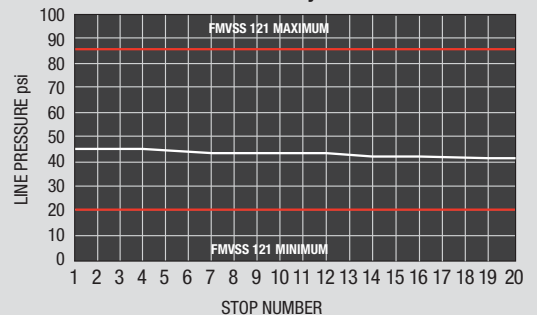

## Dynamometer Wear Test — ARM TP 212 Procedure

